

## Low-power Consumption Dual Operation Amplifier

### Function description:

- LMV358 includes two independent, high-gain and internal frequency-compensated dual-operational amplifiers. It is applicable to application of single power supply with very wide supply voltage ranges, and is also applicable to the dual-power working mode. It has wide working ranges.
- SOP8 package is adopted for LMV358. Generally, LMV358 is an operational amplifier with low power consumption and wide power supply ranges, which can be designed for various applications with favorable price at the premise of not giving away precious circuit board space.



### Main characteristics of chip functions:


- Internal frequency compensation, DC voltage gain of 100dB higher
- Unit gain frequency bandwidth: 1MHZ
- Low power consumption current, suitable for battery supply
- Low input bias current 45nA
- Volt Current Condenser Input +3V to5V
- Low input offset voltage and offset current
- Wide common-mode input voltage ranges
- Wide difference-mode input voltage ranges
- Large output voltage swing

### SOP-8

#### Applications:

- Charger
- Power adapter
- Sensor amplifier
- Piezoelectric sensor amplifier
- Medical instruments, industrial control
- Audio amplifier output
- DC gain module DC gain parts

**Simplified schematic diagram:**

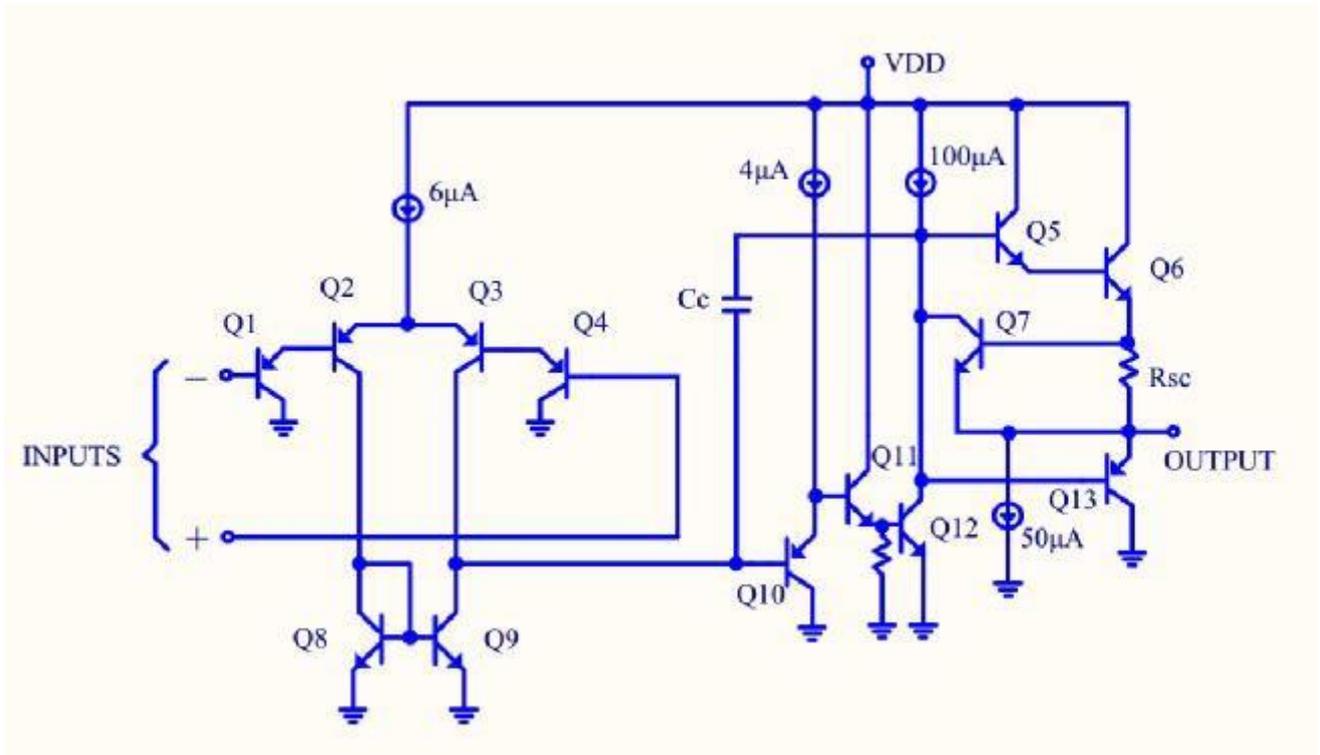

**Absolute Max. rated value:**


Differential input voltage	±Volt	Current	Condenser
Input current ( $V_{IN} < -0.3V$ ) <sup>(2)</sup>			50mA
Supply voltage ( $V+ - V-$ )			5.5 V
Input Voltage			-0.3V to +5V
Output short circuit to GND			continuous
$V+ \leq 15V$ and $T_A = 25^\circ C$ <sup>(3)</sup>			
Storage Temperature Range <sup>(4)</sup>			-65°C to 150°C
Junction temperature			150°C
Installation temperature			60°C
Lead temperature (welding, 10 seconds)			215°C
Infrared (10 seconds)			
Thermal resistance to the environment ( $\theta_{JA}$ )			265°C/W
ESD tolerance <sup>(5)</sup>			300 V

- (1) The absolute maximum rated value indicates the limits of the ranges of the device, and damages may be caused if the limits are exceeded. The operating rated value indicates the conditions for normal working of the device; in which conditions, it is difficult to ensure specific performances.  
Please refer to electrical characteristics for the specifications and the testing conditions to be ensured.
- (2) The input current exists only when any voltage of the input lead is negative. That is because the base junction of the collector of the input PNP crystal valve changes forward bias, so as to work as the input diode clamping.  
In addition to this function as a diode, there are horizontal NPN crystal valve parasitism actions in the IC chip. The crystal valve action can make the output voltage of the operational amplifier achieve V+ voltage level (or grounded as a big overload) within the time period of negative input driving. It is not destructive; when the negative input voltage returns to higher than -0.36V (at 25°C) again, the normal output state is established again.
- (3) The output V+ short circuit may lead to overheating and ultimate destruction. When considering of grounded short circuit, the maximum output current is about 40mA, which is irrelevant to the size of V+. When the supply voltage exceeds 5.5V, continuous short circuit may exceed the rated power, leading to final destruction.
- (4) The maximum power consumption is the T<sub>J</sub> (the maximum value), θ<sub>JA</sub> and T<sub>A</sub> of a function. The maximum power consumption at any environment temperature  $PD = (T_J(\max) - T_A) / \theta_{JA}$ . All the digits are applicable to direct welding to the PCB board.
- (5) Human body model, 1.5kΩ in series of 100pF.

### Operating ranges:

temperature range	-40°C to 85°C
Volt Current	3V to 5.5V

### Diagram of foot position :



Number	Symbol	Description
1	1OUT	Output end1
2	1IN-	Reverse input end 1
3	1IN+	Same input end 1
4	GND	Power ground
5	2IN+	Same input end 2
6	2IN-	Reverse input end 2
7	2OUT	Output end 2
8	VCC	Input supply positive


**Electrical specifications :**
**Unless otherwise specified, all the limits are designated as TA = 25°C; V+ = 5V, V- = 0V, VO = 1.4V.**

Symbol	Parameters	Conditions	Min	Typical value	Max(	Unit
Vos	Input offset voltage			3	7 9	mV
Ios	Input offset current			5	50 <b>150</b>	nA
IB	Bias current <sup>(4)</sup>			45	250 <b>500</b>	nA
V <sub>CM</sub>	Common-mode input voltage ranges	V <sub>+</sub> = 3V <sup>(5)</sup> For CMRR > = 50dB	0		V <sub>+</sub> -1.5 V <sub>+</sub> -2	V
A <sub>v</sub>	Large signal voltage gain	(V <sub>+</sub> = 5V, R <sub>L</sub> = 2kΩ V <sub>O</sub> = 2.4V to 4.4V)	25 <b>15</b>	100		V/mV
PSRR	Power supply rejection ratio	R <sub>S</sub> ≤ 10kΩ, V <sub>+</sub> ≤ 3V to 5.5V	65	100		dB
CMRR	Common mode rejection ratio	R <sub>S</sub> ≤ 10kΩ	65	80		dB
V <sub>O</sub>	Output voltage	V <sub>+</sub> = 3V, R <sub>L</sub> = 2kΩ	<b>2.6</b>			V
		V <sub>+</sub> = 3V, R <sub>L</sub> = 10kΩ	<b>2.7</b>	<b>2.8</b>		
		V <sub>+</sub> = 5V, R <sub>L</sub> = 10kΩ		<b>5</b>	<b>20</b>	mV
I <sub>S</sub>	Supply voltage, No load	V <sub>+</sub> = 5V		0.430 <b>0.7</b>	1.15 <b>1.2</b>	mA
		V <sub>+</sub> = 3V		0.660 <b>1.5</b>	2.85 <b>3</b>	
I <sub>SOURCE</sub>	output current source	V <sub>ID</sub> = +1V, V <sub>+</sub> = 5V, V <sub>O</sub> = 2V	20 <b>10</b>	40 <b>20</b>		mA
I <sub>SINK</sub>	Output Sinking current	V <sub>ID</sub> = -1V V <sub>+</sub> = 5V, V <sub>O</sub> = 2V	10 <b>5</b>	20 <b>8</b>		mA
		V <sub>ID</sub> = -1V V <sub>+</sub> = 5V, V <sub>O</sub> = 0.2V	12	100		μA
I <sub>O</sub>	Output short circuit to ground <sup>(6)</sup>	V <sub>+</sub> = 5V		40	85	mA

SR	Slew rate	$V^+ = 5V, R_L = 2k\Omega,$ $V_{IN} = 0.5 \text{ to } 3V$ $C_L = 100pF, \text{ Unity Gain}$	0.3		$V/\mu s$
GBW	Gain bandwidth product	$V^+ = 5V, f = 100kHz,$ $V_{IN} = 10mV, R_L = 2k\Omega$ $C_L = 100pF$	1		MHz
$\phi_m$	Phase margin		60		deg
THD	Total harmonic distortion	$f = 1kHz, A_v = 20dB$ $R_L = 2k\Omega, V_o = 2V_{pp}$ $C_L = 100pF, V^+ = 3V$	0.015		%
$e_n$	Voltage noise density	$f = 1kHz, R_s = 100\Omega$ $V^+ = 5V$	40		$nV/\sqrt{Hz}$

- (1) All the limiting values are tested by experiments and determined based on statistical analysis.
- (2) The typical values indicate the most likely parameters.
- (3)  $V_O = 1.4V, R_S = 0\Omega$   $V^+$ , from 3V to 5V; however, the whole input common mode range (0V to  $V^+ + 1.5V$ ) is at 25°C.
- (4) Since the PNP input level and the input current direction exceed the  $I_C$ . the current is basically constant, independent from the output state; for this reason, there is no change in loading in the input line.
- (5) The unloading of the input common mode voltage or the input signal voltage shall be no more than 0.3V (at 25°C. The upper limit of the common mode voltage range is  $V^+ - 1.5V$  at 25°C.  
however, one or two inputs can achieve 5V, which will not lead to damage.
- (6) The short circuit of the output  $V^+$  may lead to overheating or ultimate destruction. Since the maximum output current of the grounded short circuit is about 40ma. with the supply voltage of more than 5V, continuous short circuit may exceed the rated power consumption, which may lead to ultimate destruction.

Package size SOP-8

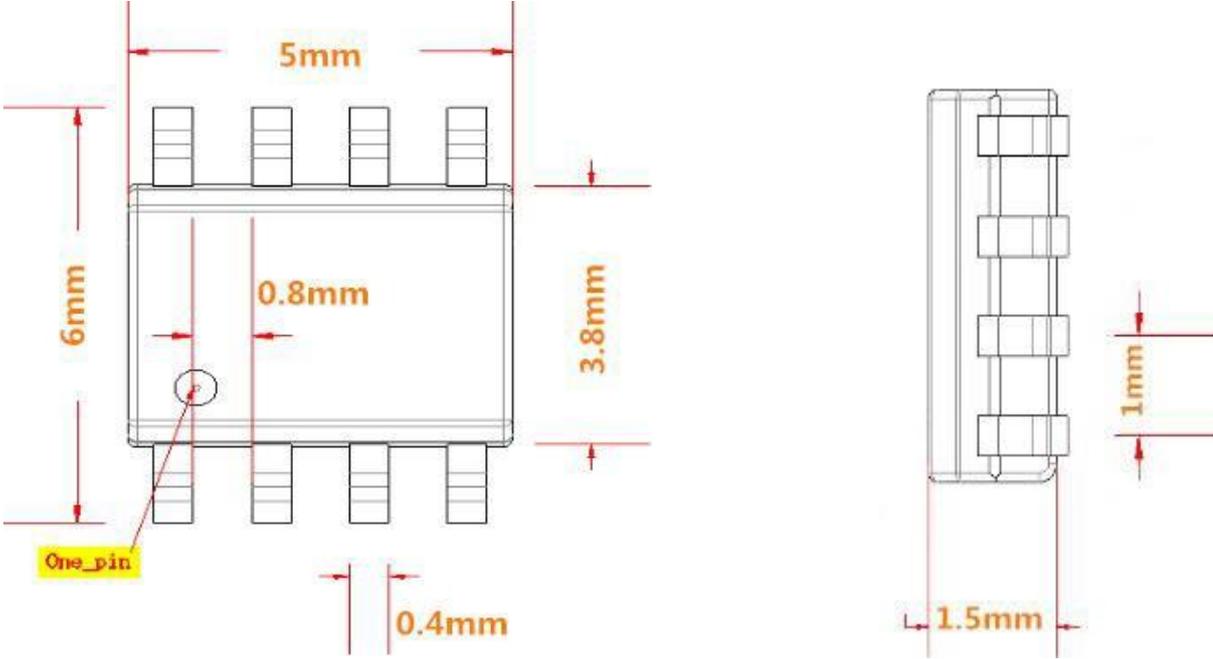

Unless otherwise prompted, all the sizes are marked as: (mm), tolerance:  $\pm 0.09\text{mm}$